



MEGAWIN

MA102

USB Low Speed Keyboard Datasheet

USB Vendor ID : 0x0E6A
USB Product ID : 0x0108

Contents

1	Description	3
2	Features.....	4
3	Block Diagram.....	5
4	Pin Configurations.....	6
4.1	Pin-out for LQFP48-pin Package.....	6
4.2	Pad Location	6
4.3	Package Dimensions.....	6
4.4	Pin Description	7
5	Keyboard Function Description.....	8
5.1	Keyboard Description	8
5.2	Generic Desktop Control Key Description	8
5.2.1	101 Standard Key.....	8
5.2.2	Consumer : Usage Page 0C.....	9
5.2.3	Generic Desktop Control : Usage Page 01	9
5.3	Generic Desktop Control LED Status	9
5.4	USB HID Keyboard Key Matrix.....	10
6	Reference Design	11
6.1	Keyboard Circuit.....	11
6.2	Keyboard BOM List	12
6.3	Keyboard EMI Reference	12
6.3.1	Vertical Report.....	13
6.3.2	Horizontal Report.....	13
7	Electrical Characteristics.....	14
7.1	DC	14
7.2	USB Transceiver Electrical Characteristics	14
8	Revision History	15

1 Description

The **MA102** is a single chip keyboard encoder. It detects the key is pressed and/or released, sends the scan code to host system, and accepts the command from host system. It also supports the USB standard request version 2.0 as well as HID class request version 1.1.

Megawin Confidential & Proprietary

2 Features

- Low-speed USB Specification version 2.0 compliance.
 - Human Interface Device
 - ✧ Keyboard
 - ✧ Generic Desktop Controls
 - ✧ Consumer
- Support USB suspend/resume for power management.
- LED direct sink pins
- Built-in 5v to 3.3v regulator.
- Built-in 6Mhz $\pm$ 1.5% oscillator with temperature 0°C ~ 70°C.
- Operating condition:
 - Operating voltage: 4.0V ~ 5.5V with USB on-line application
 - Operating speed range: DC to 6MHz @VDD>2.7V
 - Operating ambient temperature: 0°C ~ 70°C for internal oscillator mode
- Package: 44PQFP and DICE
- Support Windows XP / Vista / Windows 7 / Windows 8 / Linux

3 Block Diagram


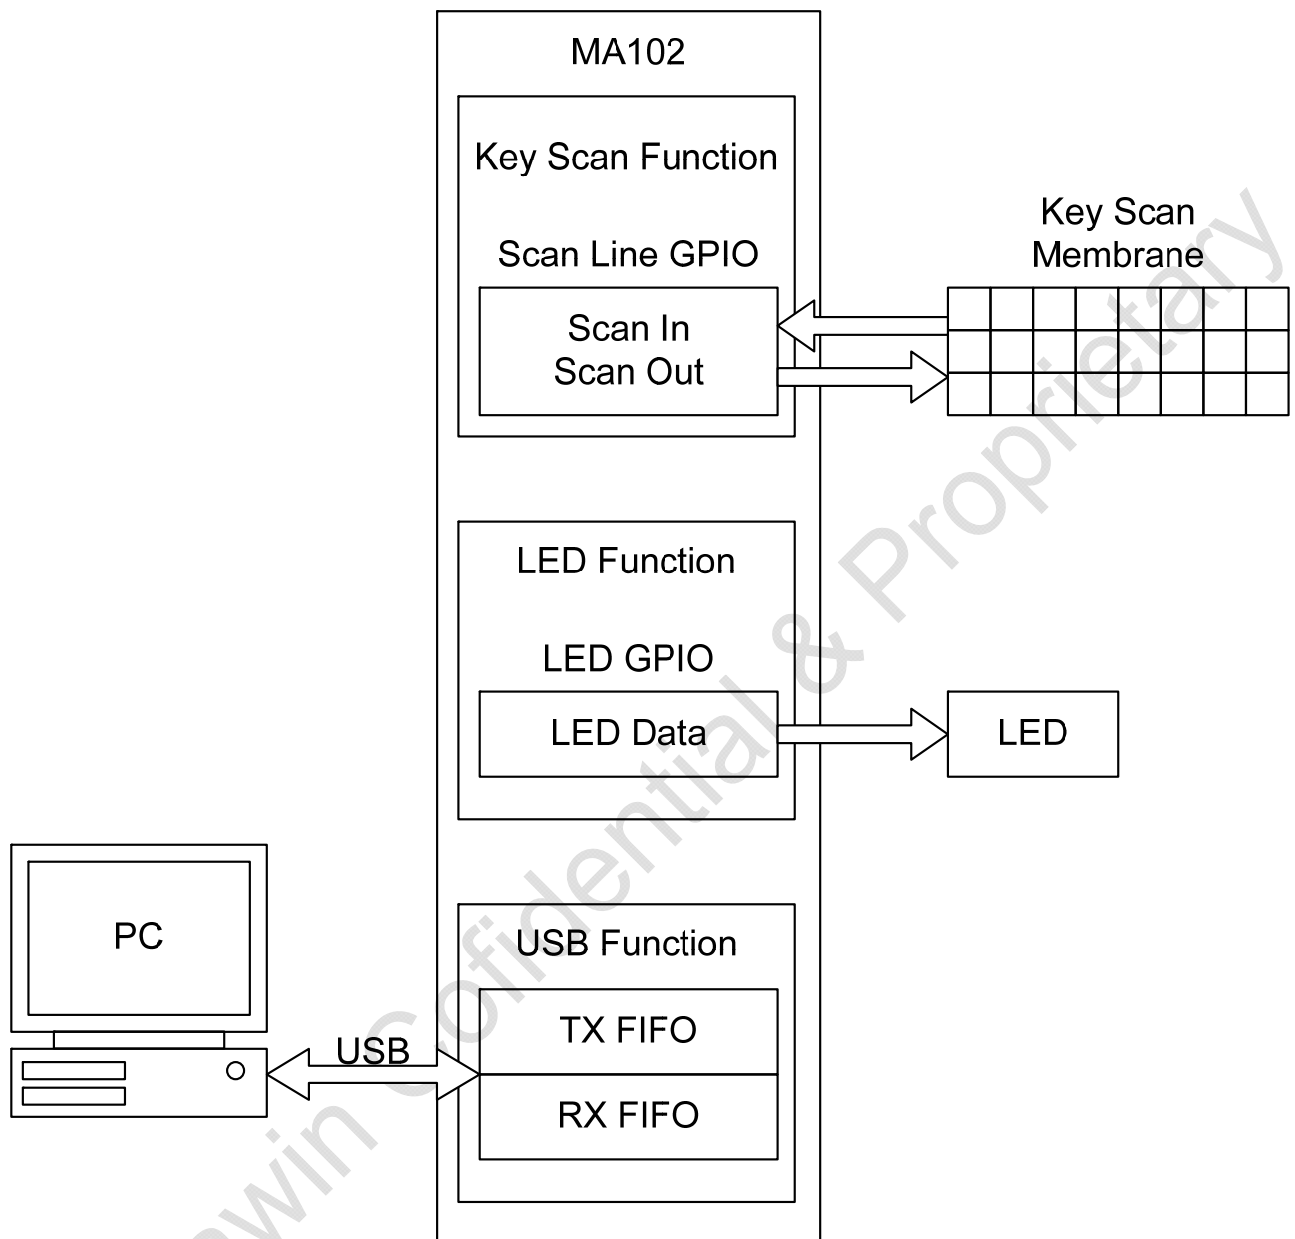



Figure 3-1 Keyboard Diagram

4 Pin Configurations

4.1 Pin-out for LQFP48-pin Package

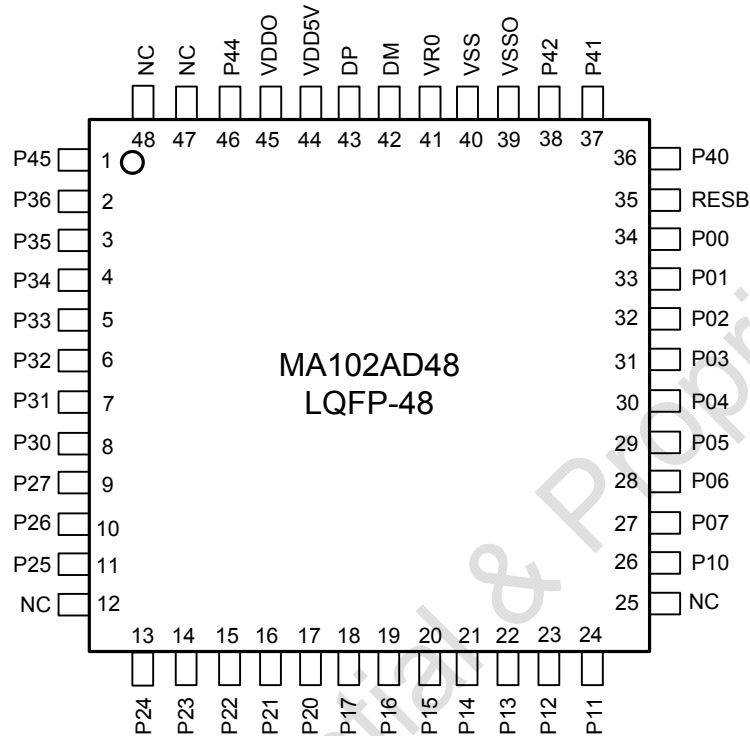

4.2 Pad Location

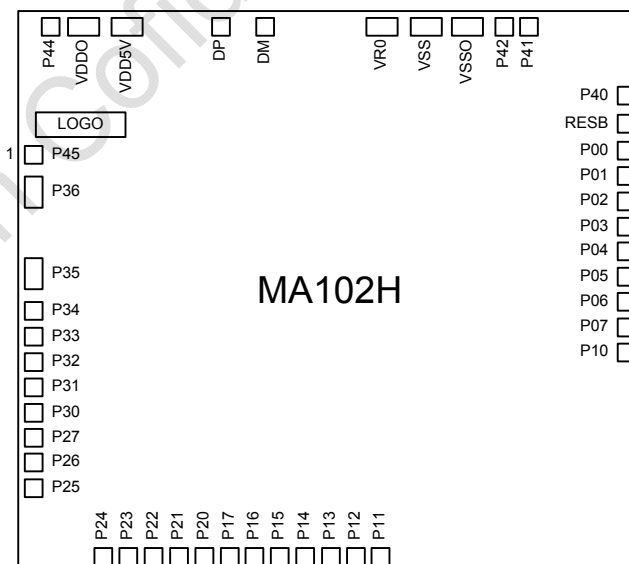

4.3 Package Dimensions

Please, visit Megawin web site under Technical Support->Literature->Package Dimension for the latest package information.

www.megawin.com.tw

4.4 Pin Description

Name	LQFP48	DICE	Type	Description
P36	2	2	B	Reserve
P35	3	3	B	Reserve
P34	4	4	B	Reserve
P33	5	5	B	Reserve
P32	6	6	B	Reserve
P31	7	7	B	Keyboard Scan Out Line 17.
P30	8	8	B	Keyboard Scan Out Line 16.
P27	9	9	B	Keyboard Scan Out Line 15.
P26	10	10	B	Keyboard Scan Out Line 14.
P25	11	11	B	Keyboard Scan Out Line 13.
P24	13	12	B	Keyboard Scan Out Line 12.
P23	14	13	B	Keyboard Scan Out Line 11.
P22	15	14	B	Keyboard Scan Out Line 10.
P21	16	15	B	Keyboard Scan Out Line 9.
P20	17	16	B	Keyboard Scan Out Line 8.
P17	18	17	B	Keyboard Scan Out Line 7.
P16	19	18	B	Keyboard Scan Out Line 6.
P15	20	19	B	Keyboard Scan Out Line 5.
P14	21	20	B	Keyboard Scan Out Line 4.
P13	22	21	B	Keyboard Scan Out Line 3.
P12	23	22	B	Keyboard Scan Out Line 2.
P11	24	23	B	Keyboard Scan Out Line 1.
P10	26	24	B	Keyboard Scan Out Line 0.
P07	27	25	B	Keyboard Scan In Line 7.
P06	28	26	B	Keyboard Scan In Line 6.
P05	29	27	B	Keyboard Scan In Line 5.
P04	30	28	B	Keyboard Scan In Line 4.
P03	31	29	B	Keyboard Scan In Line 3.
P02	32	30	B	Keyboard Scan In Line 2.
P01	33	31	B	Keyboard Scan In Line 1.
P00	34	32	B	Keyboard Scan In Line 0.
RESB	35	33	I	Reset pin, low action, have internal weak pull high resistor.
P40	36	34	B	Number Lock LED directly sink.
P41	37	35	B	Capitals Lock LED directly sink.
P42	38	36	B	Scroll Lock LED directly sink.
VSSO	39	37	G	Ground
VSS	40	38	G	Ground
VR0	41	39	P	Regulator pin, a capacitor should be added on this pin.
DM	42	40	B	USB DM I/O, USB LS transceiver.
DP	43	41	B	USB DP I/O, USB LS transceiver.
VDD5V	44	42	P	5V Power
VDDO	45	43	P	5V Power
P44	46	44	B	Reserve
P45	1	1	B	Reserve

Note: In the "Type" field,
 "I" means input only.
 "O" means output only.
 "B" means bi-direction.
 "P" means Power, G means Ground.

5 Keyboard Function Description

5.1 Keyboard Description

- USB specification : 2.00
- Vendor ID: 0x0E6A
- Product ID: 0x0108
- String Code : 0x0409
 - Manufacturer String : Megawin Technology Co., Ltd.
 - Product String : USB Multi-Media Keyboard
- Max power : 100mA

5.2 Generic Desktop Control Key Description

5.2.1 101 Standard Key

Usage Page 07 Table

Key	Usage HID ID	Key	Usage HID ID	Key	Usage HID ID	Key	Usage HID ID
A	04	1!	1E	Caps Lock	39	Num Lock	53
B	05	2@	1F	F1	3A	Pad /	54
C	06	3#	20	F2	3B	Pad *	55
D	07	4\$	21	F3	3C	Pad -	56
E	08	0.05	22	F4	3D	Pad +	57
F	09	6^	23	F5	3E	Pad Enter	58
G	0A	7&	24	F6	3F	Pad 1	59
H	0B	8*	25	F7	40	Pad 2	5A
I	0C	9(	26	F8	41	Pad 3	5B
J	0D	0)	27	F9	42	Pad 4	5C
K	0E	Enter	28	F10	43	Pad 5	5D
L	0F	Esc	29	F11	44	Pad 6	5E
M	10	Backspace	2A	F12	45	Pad 7	5F
N	11	Tab	2B	Print Screen	46	Pad 8	60
O	12	Space	2C	Scroll Lock	47	Pad 9	61
P	13	- _	2D	Pause	48	Pad 0	62
Q	14	= +	2E	Insert	49	Pad .	63
R	15	[{	2F	Home	4A	APP	65
S	16	] }	30	Page Up	4B	Left Ctrl	E0
T	17	\	31	Delete	4C	Left Shift	E1
U	18	::	33	End	4D	Left Alt	E2
V	19	”	34	Page Down	4E	Left Win	E3
W	1A	` ~	35	→	4F	Right Ctrl	E4
X	1B	, <	36	←	50	Right Shift	E5
Y	1C	. >	37	↓	51	Right Alt	E6
Z	1D	/ ?	38	↑	52	Right Win	E7

Modifier Data Format

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Right Win	Right Alt	Right Shift	Right Ctrl	Left Win	Left Alt	Left Shift	Left Ctrl

5.2.2 Consumer : Usage Page 0C

Function	Make	Break	Function	Make	Break
www Back	02 24	00 00	Volume-	00 EA	00 00
www Forward	02 25	00 00	Volume+	00 E9	00 00
www Stop	02 26	00 00	Media Play/Pause	00 CD	00 00
www Refresh	02 27	00 00	Media Stop	00 B7	00 00
www Search	02 21	00 00	Media Prev Track	00 B6	00 00
www My Favorite	02 2A	00 00	Media Next Track	00 B5	00 00
Web/Home	02 23	00 00	Media Select	01 83	00 00
Mail	01 8A	00 00	My Computer	01 94	00 00
Mute	00 E2	00 00	Calculator	01 92	00 00

5.2.3 Generic Desktop Control : Usage Page 01

Function	Make	Break
Power Down	81	00
Sleep	82	00
Wakeup	83	00

5.3 Generic Desktop Control LED Status

Support direction sink LED by GPIO

P40	Number Lock LED directly sink.
P41	Capitals Lock LED directly sink.
P42	Scroll Lock LED directly sink.

5.4 USB HID Keyboard Key Matrix

	P00	P01	P02	P03	P04	P05	P06	P07
P10		Right Ctrl		Power	Left Ctrl	Sleep		
P11	Scroll Lock	2@	~	B	Page Up	}]	1!	Pad *
P12				Left Alt			Right Alt	
P13	Pad Enter	F9	W	F1	F10	Esc	Pad 8	F8
P14	Print Screen	S	F4	F3	↓	Pad 6	Power	
P15	Insert	F12	↑	U	F11	E	I	Pad 4
P16	Pad 7	F6	Pad 5	Media Play/Pause	A	←	Sleep	F7
P17		.>	K	{[	L	J	F5	
P20	Z	Pad 2	;;	F2	-_	N	F	0)
P21	www Back	Mail	www forward	www Stop	www Refresh	Mute	www Search	Left Win
P22		3#	4\$	G	Q	H	TAB	Pad -
P23	APP	End	Pad 0	Caps Lock	Num Lock	Enter	Page Down	Pad /
P24	V	7&	,<	Pad 3	+ =	M	8*	9(
P25	Backspace	Pad +	5%	6^	R	T	Y	Home
P26	Right Win	Web/Home		www Favorite	Media Stop		My Computer	Calculator
P27	Pause	→	"'	D	Pad 1	P	O	/?
P30	Space	Pad 9	Pad .		\	Delete	X	C
P31	Media Previous Track	Media Select	Left Shift	Volume +	Wake up	Right Shift	Volume -	Media Next Track

6 Reference Design

6.1 Keyboard Circuit

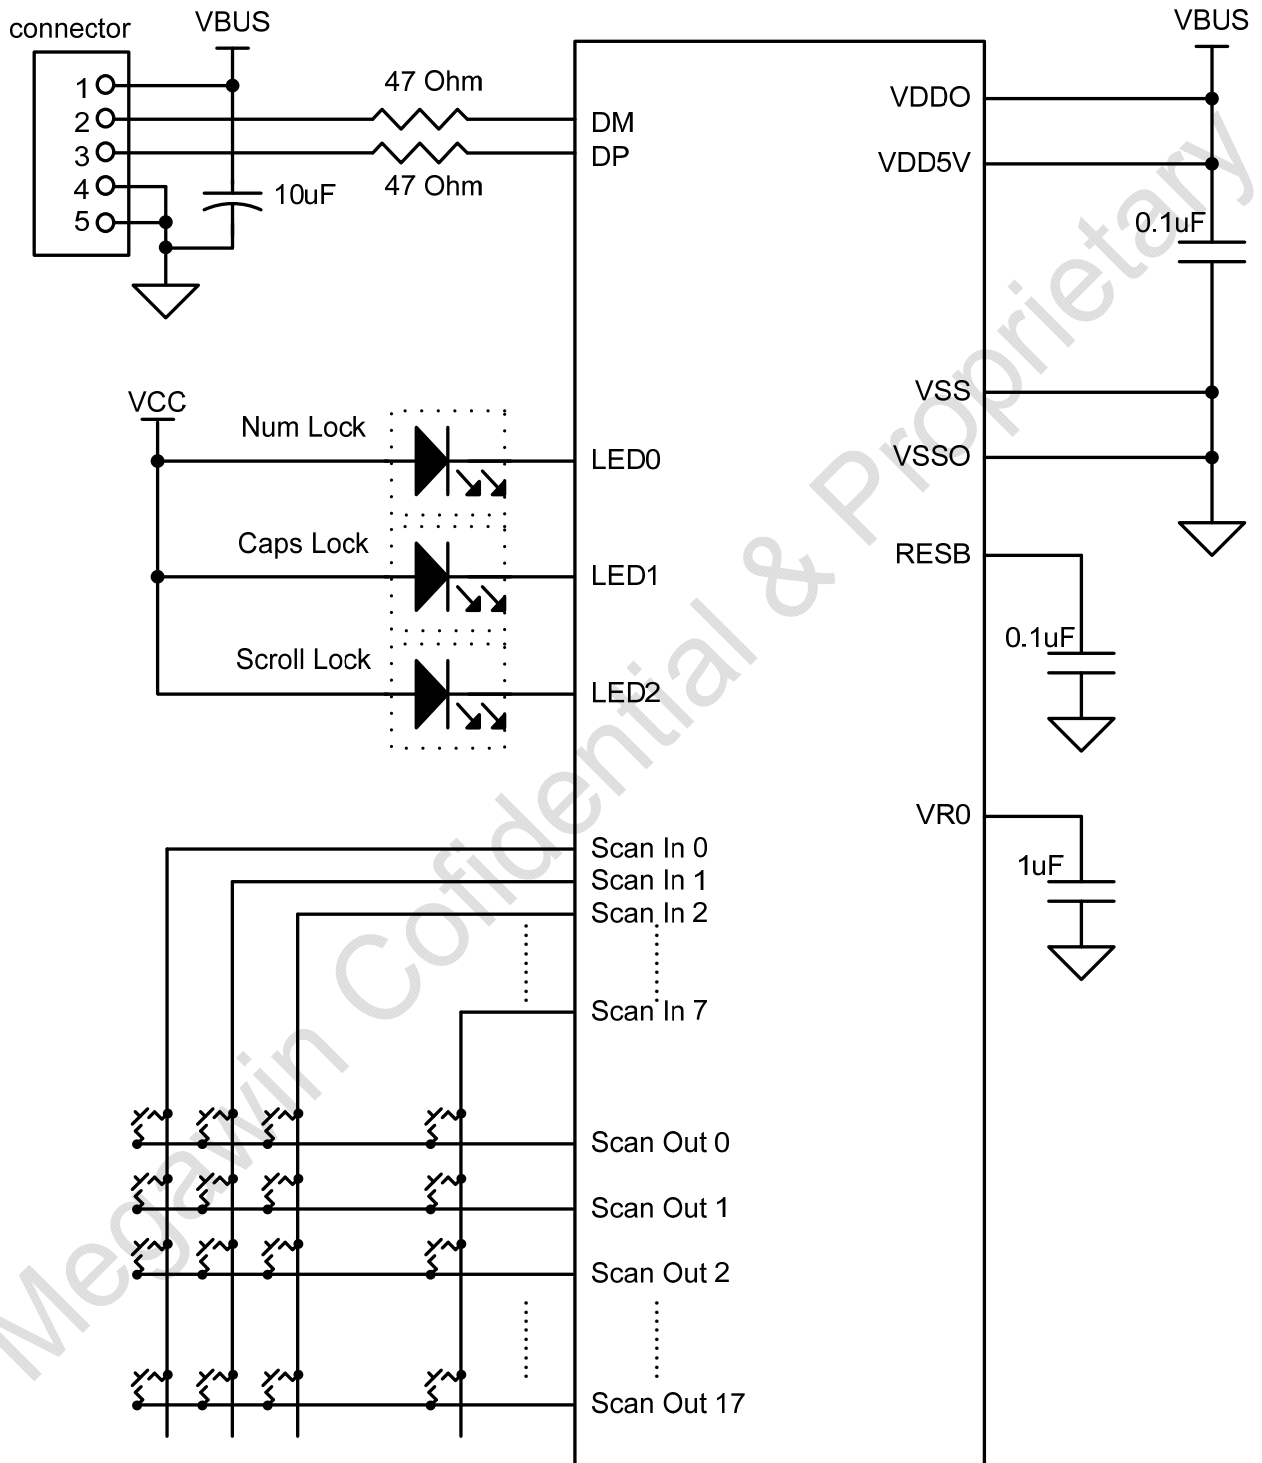


Figure 6-1 Keyboard Circuit

6.2 Keyboard BOM List

Table 6-1 USB Keyboard BOM List

Comment	Pattern	Quantity	Note
MA102	DICE or LQFP48	1	USB HID Keyboard
10u/16V	SMD or DIP	1	VBUS to GND (Near by USB connector)
1u/16V	SMD or DIP	1	VR0 to GND (Near by MA102)
0.1u/16V	SMD or DIP	2	RESB to GND VBUS to GND (Near by MA102)
LED-G	SMD or DIP	3	LED GRN 17-21VGC/TR8 VR5V 30mA


6.3 Keyboard EMI Reference

- Lab : CRC TR1 10M RE CHAMBER
- EUT : PC(110V) and USB Keyboard
- Keyboard PCB Layout
 - Single Layer (CEM3) : 1.6mm
 - Thick Cu : 1 oz
- Cable without ring core
 - About 1m60cm




- Key-scan : Silver membrane without VSS shielding
- ALL LED ON.

6.3.1 Vertical Report

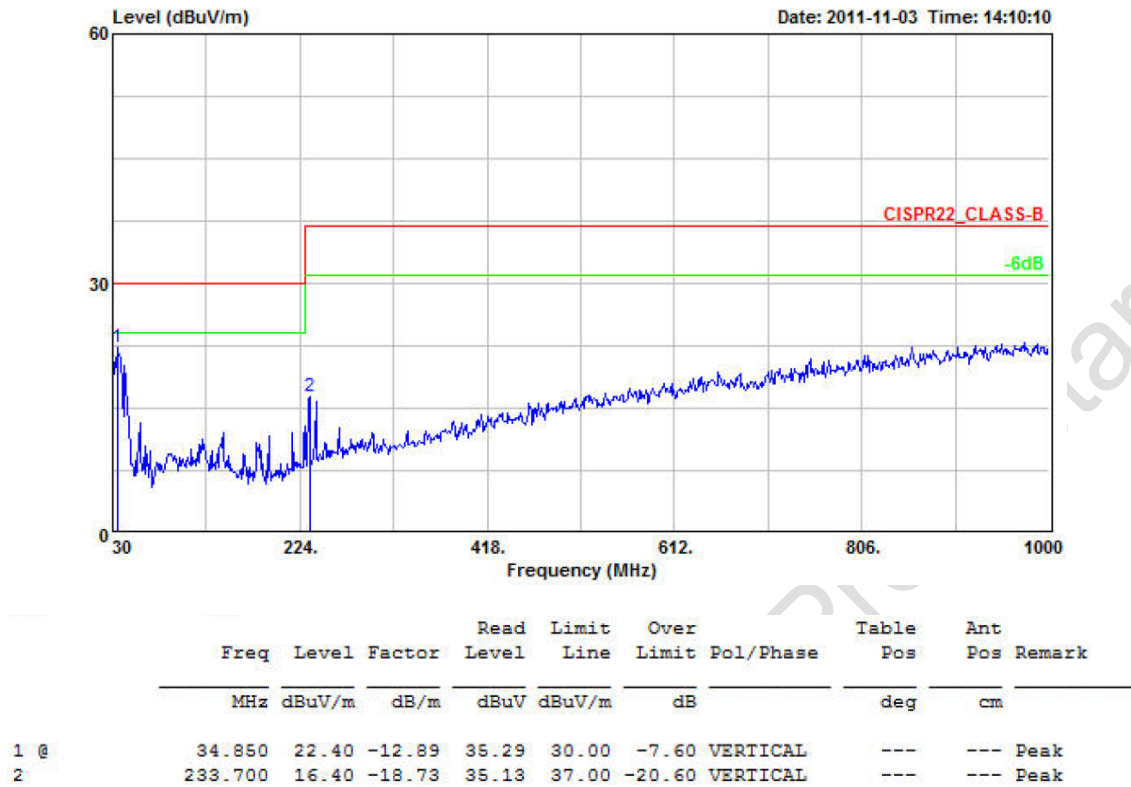

6.3.2 Horizontal Report

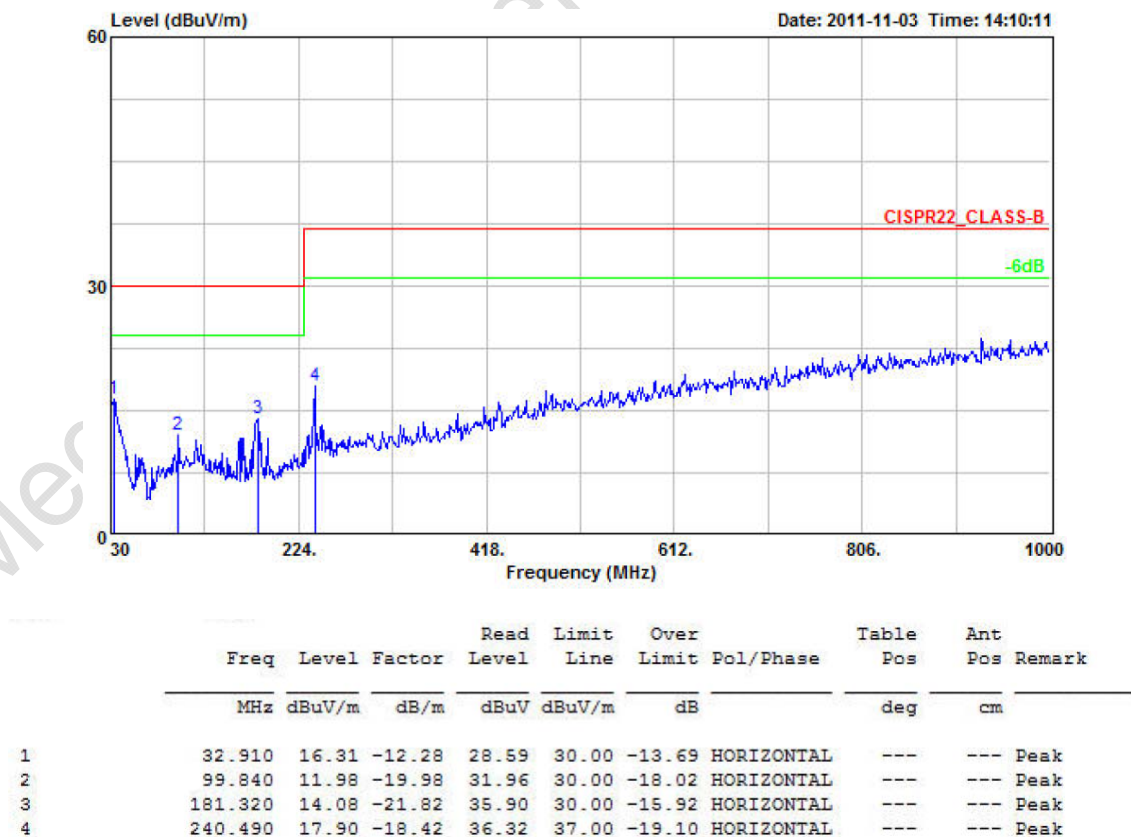

7 Electrical Characteristics

7.1 DC

VSS = 0V, TA = 25 °C, VDD = 5.0V and execute NOP for each machine cycle, unless otherwise specified

Symbol	Parameter	Test Condition	Limits			Unit
			min	typ	max	
V _{IH1}	Input High voltage (All I/O Ports except P35&P36)		2.0			V
V _{IH2}	Input High voltage (RESET)		3.7			V
V _{IL1}	Input Low voltage (All I/O Ports except P35&P36)				0.8	V
V _{IL2}	Input Low voltage (RESET)				1.5	V
I _{OL1}	Output Low current (All I/O Ports except P35&P36)	V _{PIN} = 0.4V V _{PIN} = 1.2V V _{PIN} = 2.6V	2	4 8 10		mA
I _{OP}	Operating current*1	F _{OSC} = 6MHz			6	mA
I _{PD}	Power down current			100	200	uA
R _{IO}	Internal pull-up resistance.		35	50	65	KΩ
R _{RST}	Internal reset pull-down resistance		35	50	65	KΩ
R _{DM}	DM pull-up resistance in USB mode		0.9	1.1	1.3	KΩ
VR0	Regulator output voltage	I _{LOAD} = 30mA	3.2		3.5	V
V _{LVDF}	Low-voltage detect flag		3.4	3.6	3.8	V
F _{INT}	Built-in oscillator frequency		5.91	6	6.09	MHz
T _{INT}	System initial time			60		ms

7.2 USB Transceiver Electrical Characteristics

VSS = 0V, TA = 25 °C, VDD = 5.0V and execute NOP for each machine cycle, unless otherwise specified

Symbol	Parameter	Test Condition	Limits			Unit
			min	typ	max	
Transmitter						
V _{OH}	Output High Voltage		2.8			V
V _{OL}	Output Low Voltage				0.8	V
V _{CRS}	Output Cross Over point		1.3		2.0	V
Z _{DRVH}	Output Impedance on Driving High		28		44	Ω
Z _{DRVL}	Output Impedance on Driving Low		28		44	Ω
T _R	Output Rise Time		75		300	ns
T _F	Output Fall Time		75		300	ns
Receiver						
V _{DI}	Differential Input Sensitivity	DP – DM	0.2			V
V _{CM}	Differential Input Common Mode Range		0.8		2.5	V
I _L	Input Leakage current	Pull-up Disabled		<1.0		uA

8 Revision History

Revision	Descriptions	Date
V0.17	Preliminary Version	2011/03/23
V0.18	Modify Application Diagram.	2011/09/19
V1.00	Initial Version	2013/05/15